




TABLE OF CONTENTS





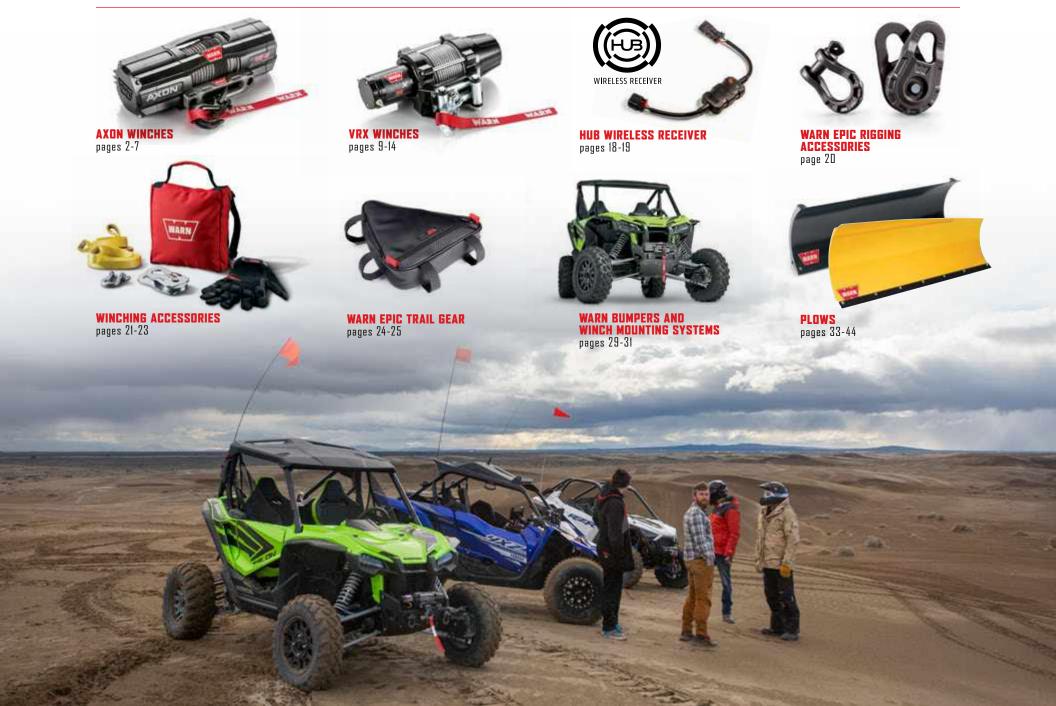

WARN AXON

Groundbreaking Technology Meets Unmatched Reliability

The AXON™ lineup has taken winching to the next level by combining a powerful motor and first-of-its-kind digital contactor into one unit called a Motactor™. The WARN Motactor increases performance, drops installation time, and provides never-before-seen levels of performance and feedback to the user. Tech is nothing without durability, so we made AXON the most durable powersports winch ever. All-metal construction, waterproof sealing, and increased structural rigidity are made for extreme environments. It's smart, tough, and perfect for a wide range of powersports vehicles. Available in 3,500, 4,500, and 5,500 pulling capacities, with a choice of steel or Spydura® synthetic rope.

- Motactor (motor + digital contactor) dramatically simplifies winch installation —reducing install time by up to 50%
- Advanced digital controls allow for monitoring of speed, load, and motor temperature
- Built-in load limiter prevents damage from overloading winch
- All-metal, IP68 waterproof construction is exceptionally durable and keeps the elements out
- Robust new clutch design based on legendary WARN 4WD hub lock know-how
- Limited lifetime warranty (mechanical), 3 year warranty (electrical)



AXON 55 Controls

Includes rockerbar digital control switch and digital corded remote.



AXON 45 Controls

Includes rockerbar digital control switch and digital corded remote.



AXON 35 Controls

Includes rockerbar digital control switch with handlebar mount adaptor. (Remote sold separately).





WARN AXON POWERSPORTS WINCHES

GROUNDBREAKING TECHNOLOGY MEETS UNMATCHED RELIABILITY

POWERFUL, HIGH-EFFICIENCY MOTOR

Redesigned and re-engineered from the ground up, the new AXON motor is the biggest in the industry, delivering maximum pulling power with minimum amp draw

PLANETARY GEAR TRAIN

The new, completely re-engineered three-stage gear train delivers reliable pulling power that is fast, quiet and more efficient than ever

WATERPROOF CONSTRUCTION™

The world's only powersports winch with full IP68 waterproof rating. Built to keep the water and elements out

FULL METAL ARMOR

Protects vital components from impact and damage. The aluminum structure also helps to dissipate heat, helping to extend winching dutycycle and performance

TIE PLATE CONSTRUCTION

SPYDURA® SYNTHETIC

OR STEEL ROPE

Increased diameter rope is rated

to exceed the rated load limit

New design delivers increased structural rigidity

WARN MOTACTOR™

Unique motor + digital contactor design dramatically simplifies installation, reducing winch install time by up to 50%

DIGITAL CONTROL

AXON delivers never-beforeseen levels of performance and user feedback including load and temperature info

MECHANICAL BRAKE

Internal brake is engineered to hold the full rated load and offers excellent control while winching

LIMITED LIFETIME WARRANTY

AXON has a limited lifetime warranty on mechanical parts, and a three-year warranty on electrical components. It's the best in the industry—all backed by a global service network and a WARN name that's trusted worldwide


WARN AXON POWERSPORTS WINCHES

GROUNDBREAKING TECHNOLOGY MEETS UNMATCHED RELIABILITY

AXON winch controls feature a colorchanging LED that provides user feedback during the winching process.

- A blue LED indicates the system is on and ready to pull. As the winching process begins and the load increases, the LED will change color.
- A green light will indicate a light load, and as the winch works harder, the LED will go to yellow, orange, then red under the heaviest loads.
- If the winch becomes too hot or reaches a capacity that may overload the unit, the LED will blink red and the winch will shut down until it's cooled down or the load is released.

These features keep the user informed and help extend the winch's service life.

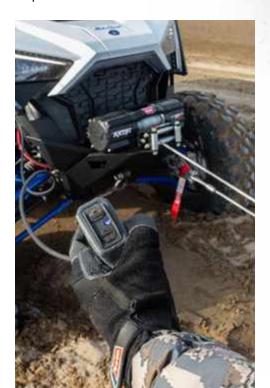



CORROSION RESISTANT FINISH

AXON 55 AND 55-S



SPECIFICATIONS

Part number: 101155 (AXON 55),

101150 (AXON 55-S)

Rated line pull: 5,500 Lbs. (2495 kg) single-line

Motor: Motactor with 12V DC permanent magnet

Sealing: IP68-rated waterproof

Gear train: 3-stage planetary

Fasteners: All stainless steel

Rope: AXON 55: 50' x 1/4" (15m x 6.3mm) steel,

AXON 55-S: 50' x 1/4" (15m x 6.3mm) Spydura synthetic

Hook: Black powder coat

Fairlead: AXON 55: Roller,

AXON 55-S: Epic hawse fairlead

Primary control: Rockerbar digital control switch

Remote control: Digital corded remote

Brake: Mechanical brake


Mechanical Warranty: Limited lifetime

Electrical Warranty: 3 year

12V DC PERFORMANCE SPECS (first layer)

Line Pull	Line Speed	Motor	Pull by layer:
Lbs. (kg)	Ft./min.	Current	layer/Lbs. (kg)
	(M/min.)		
0	15.5 (4.7)	31.5 amps	1/5500 (2495)
500 (227)	13.3 (4.1)	55.9 amps	2/4582 (2078)
1000 (454)	11.5 (3.5)	80.8 amps	3/3926 (1781)
1500 (680)	9.9 (3.0)	106.0 amps	4/3434 (1558)
2000 (907)	8.7 (2.6)	131.2 amps	
2500 (1134)	7.6 (2.3)	156.2 amps	
3000 (1361)	6.8 (2.1)	180.8 amps	
3500 (1588)	6.1 (1.9)	204.8 amps	
4000 (1814)	5.6 (1.7)	228.1 amps	
4500 (2041)	5.1 (1.6)	250.3 amps	
5000 (2268)	4.7 (1.4)	271.3 amps	
5500 (2495)	4.3 (1.3)	290.9 amps	

DIMENSIONS



(A)	15.0" (381.8mm)	(C)	5.19" (132mm)	
(B)	4.82" (122.5mm)	(D)	5.02" ((127.6mm)	

Mounting bolt pattern: 3.0" x 6.59" (76.2mm x 167.4mm)

AXON 45 AND 45-S



SPECIFICATIONS

Part number: 101145 (AXON 45),

101140 (AXON 45-S)

Rated line pull: 4,500 Lbs. (2041 kg) single-line

Motor: Motactor with 12V DC permanent magnet

Sealing: IP68-rated waterproof

Gear train: 3-stage planetary

Fasteners: All stainless steel

Rope: AXON 45: 50' x 1/4"(15m x 6.3mm) steel,

AXON 45-S: 50' x 1/4" (15m x 6.3mm) Spydura synthetic

Hook: Black powder coat

Fairlead: AXON 45: Roller,

AXON 45-S: Epic hawse fairlead

Primary control: Rockerbar digital control switch

Remote control: Digital corded remote

Brake: Mechanical Brake


Mechanical Warranty: Limited lifetime

Electrical Warranty: 3 year

12V DC PERFORMANCE SPECS (first layer)

Line Pull	Line Speed	Motor	Pull by layer:
Lbs. (kg)	Ft./min.	Current	layer/Lbs. (kg)
	(M/min.)		
0	15.9 (4.8)	32.8 amps	1/4500 (2041)
500 (227)	13.9 (4.2)	56.5 amps	2/3749 (1700)
1000 (454)	12.2 (3.7)	80.7 amps	3/3212 (1457)
1500 (680)	10.8 (3.3)	104.9 amps	4/2810 (1275)
2000 (907)	9.5 (2.9)	128.9 amps	
2500 (1134)	8.5 (2.6)	152.5 amps	
3000 (1361)	7.7 (2.3)	175.4 amps	
3500 (1588)	7.0 (2.1)	197.4 amps	
4000 (1814)	6.5 (2.0)	218.2 amps	
4500 (2041)	6.1 (1.9)	237.6 amps	

DIMENSIONS



A	15.0" (381.8mm)	© 5.19" (132mm)
B)	4.82" (122.5mm)	(D) 5.02" (127.6mm)

Mounting bolt pattern: 3.0" x 6.59" (76.2mm x 167.4mm)

AXON 45RC (SHORT DRUM)



SPECIFICATIONS

Part number: 101240 (AXON 45RC)

Rated line pull: 4,500 Lbs. (2041 kg) single-line

Motor: Motactor with 12V DC permanent magnet

Sealing: IP68-rated waterproof

Gear train: 3-stage planetary

Fasteners: All stainless steel

Rope: AXON 45RC: 27' x 1/4"(8m x 6.3mm)

Spydura synthetic

Hook: Black powder coat

Fairlead: AXON 45RC: Epic hawse fairlead

Primary control: Rockerbar digital control switch

Remote control: Digital corded remote

Brake: Mechanical Brake


Mechanical Warranty: Limited lifetime

Electrical Warranty: 3 year

12V DC PERFORMANCE SPECS (first layer)

Line Pull	Line Speed	Motor	Pull by layer:
Lbs. (kg)	Ft./min.	Current	layer/Lbs. (kg)
	(M/min.)		
0	14.3 (4.4)	32.6 amps	1/4500 (2041)
500 (227)	12.6 (3.8)	56.8 amps	2/3749 (1700)
1000 (454)	11.2 (3.4)	79.7 amps	3/3212 (1457)
1500 (680)	10.1 (3.1)	101.5 amps	4/2810 (1275)
2000 (907)	9.1 (2.8)	122.4 amps	
2500 (1134)	8.3 (2.5)	142.7 amps	
3000 (1361)	7.7 (2.3)	162.5 amps	
3500 (1588)	7.1 (2.2)	182.1 amps	
4000 (1814)	6.6 (2.0)	201.6 amps	
4500 (2041)	6.1 (1.9)	221.3 amps	

DIMENSIONS



(A) 13.31" (338.1mm) (C) 3.47" (88.3mm) (B) 4.80" (122mm) (D) 3.30" (83.9mm)

Mounting bolt pattern: 3.0" x 4.87" (76.2mm x 123.7mm)

AXON 35 AND 35-S





12V DC PERFORMANCE SPECS (first layer)

Line Pull	Line Speed	Motor	Pull by layer:
Lbs. (kg)	Ft./min.	Current	layer/Lbs. (kg)
	(M/min.)		
0	20.1 (6.1)	34.4 amps	1/3500 (1588)
500 (227)	17.4 (5.3)	61.6 amps	2/2934 (1331)
1000 (454)	15.2 (4.6)	88.8 amps	3/2525 (1145)
1500 (680)	13.4 (4.1)	116.1 amps	4/2216 (1005)
2000 (907)	11.9 (3.6)	143.7 amps	5/1975 (896)
2500 (1134)	10.6 (3.2)	171.5 amps	
3000 (1361)	9.4 (2.9)	199.4 amps	
3500 (1588)	8.4 (2.6)	226.8 amps	

SPECIFICATIONS

Part number: 101135 (AXON 35),

101130 (AXON 35-S)

Rated line pull: 3,500 Lbs. (1588 kg) single-line

Motor: Motactor with 12V DC permanent magnet

Sealing: IP68-rated waterproof

Gear train: 3-stage planetary

Fasteners: All stainless steel

Rope: AXON 35: 50' x 7/32"(15m x 6.3mm) steel,

AXON 35-S: 50' x 3/16" (15m x 4.8mm) Spydura synthetic

Hook: Black powder coat

Fairlead: AXON 35: Roller,

AXON 35-S: Epic hawse fairlead

Primary control: Rockerbar digital control switch

with handlebar mount adaptor


Remote control: Sold separately

Brake: Mechanical Break

Mechanical Warranty: Limited lifetime

Electrical Warranty: 3 year

DIMENSIONS



(A)	13.31" (338.1mm)	©	3.47" (88.3mm)
f B	4.80" (122mm)	(D)	3.30" (83.9mm)

Mounting bolt pattern: 3.0" x 4.87" (76.2mm x 123.7mm)





WARN VRX

All-New Lineup Takes Performance And Value To Levels Never Before Seen In A Powersports Winch

Whether you're on the job or on the trail, WARN VRX winches work as hard as you do thanks to all-metal construction, a clutch based on the legendary WARN 4WD hublock design, an ultra-durable all-metal gear train, and full waterproof sealing to take on the elements. VRX is available in 2,500, 3,500, and 4,500 lb. capacities and is perfect for a variety of vehicles and any job—big or small.

- Full IP68-rated waterproof sealing keeps the elements out
- Durable all-metal construction
- Robust new clutch design based on 70+ years of WARN 4WD hub lock know-how
- Black powder-coated finish for corrosion resistance
- · Load-holding brake for great control
- Smooth and reliable all-metal three-stage planetary gear train
- Limited lifetime warranty (mechanical),
 3 year warranty (electrical)



VRX 45 Controls Includes dash-mounted

control switch and corded remote.

VRX 35 Controls

Includes handlebar mini-rocker control switch. (Remote sold separately.)




Includes handlebar mini-rocker control switch. (Remote sold separately.)





WARN® VRX™ POWERSPORTS WINCHES

PREMIUM FEATURES WITHOUT THE PREMIUM PRICE

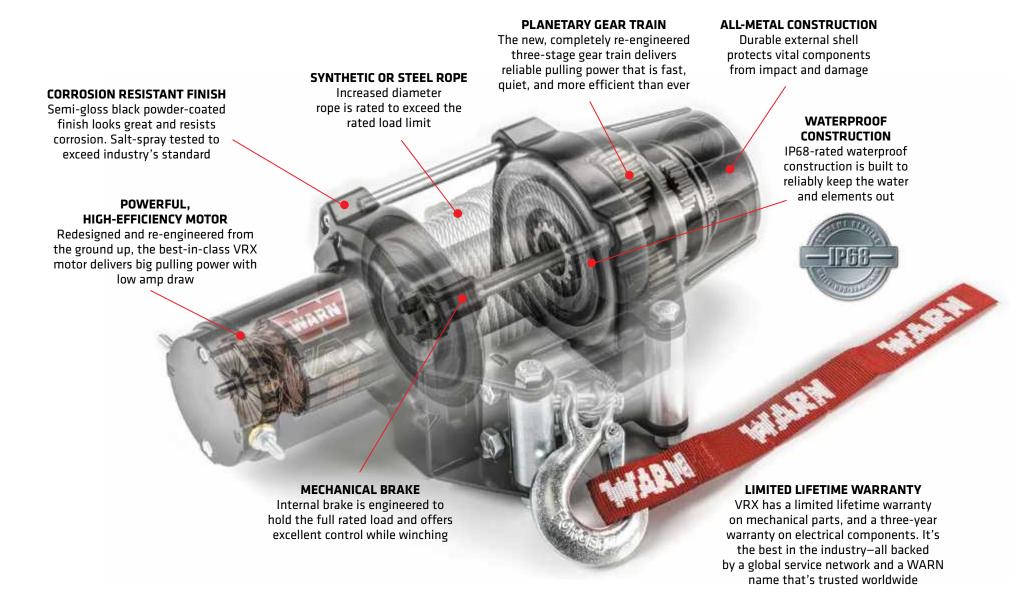

WARN® VRX™ POWERSPORTS WINCHES

PREMIUM FEATURES WITHOUT THE PREMIUM PRICE



VRX 45 AND 45-S



SPECIFICATIONS

Part number: 101045 (VRX 45), 101040 (VRX 45-S)

Rated line pull: 4,500 Lbs. (2041 kg) single-line

Motor: 12V DC permanent magnet **Sealing:** IP68-rated waterproof

Gear train: 3-stage planetary
Fasteners: All stainless steel

Rope: VRX 45: 50' x 1/4" (15m x 6.3mm) steel, VRX 45-5: 50' x 1/4" (15m x 6.3mm) synthetic

Hook: Zinc plated

Fairlead: VRX 45: Roller,

VRX 45-S: Cast aluminum hawse

Primary control: Dash-mounted rocker

Remote control: Corded remote

Brake: Mechanical Brake


Mechanical Warranty: Limited lifetime

Electrical Warranty: 3 year

12V DC PERFORMANCE SPECS (first layer)

Line Pull	Line Speed	Motor	Pull by layer:
Lbs. (kg)	Ft./min.	Current	layer/Lbs. (kg)
	(M/min.)		
0	16.2 (4.9)	20 amps	1/4500 (2041)
500 (227)	14.1 (4.3)	44 amps	2/3749 (1700)
1000 (454)	12.2 (3.7)	69 amps	3/3212 (1457)
1500 (680)	10.5 (3.2)	94 amps	4/2810 (1275)
2000 (907)	9.0 (2.7)	119 amps	
2500 (1134)	7.7 (2.3)	145 amps	
3000 (1361)	6.5 (2.0)	171 amps	
3500 (1588)	5.6 (1.7)	198 amps	
4000 (1814)	4.9 (1.5)	225 amps	
4500 (2041)	4.3 (1.3)	252 amps	

DIMENSIONS



(A) 14.96" (380.2mm)	① 3.99" (101.4mm)
B 4.74" (120.5mm)	(E) 5.02" (127.6mm)
© 3.15" (80 mm)	(F) 5.19" (132mm)

Mounting bolt pattern: 3.0" x 6.59" (76.2mm x 167.4mm)

VRX 35 AND 35-S



SPECIFICATIONS

Part number: 101035 (VRX 35),

101030 (VRX 35-S)

Rated line pull: 3,500 Lbs. (1588 kg) single-line

Motor: 12V DC permanent magnet
Sealing: IP68-rated waterproof

Gear train: 3-stage planetary

Fasteners: All stainless steel

Rope: VRX 35: 50' x 7/32" (15m x 5.5mm) steel, VRX 35-S: 50' x 3/16" (15m x 4.8mm) synthetic

Hook: Zinc plated

Fairlead: VRX 35: Roller,

VRX 35-S: Cast aluminum hawse

Primary control: Handlebar-mounted rocker switch

Remote control: Sold Separately

Brake: Mechanical Brake


Mechanical Warranty: Limited lifetime

Electrical Warranty: 3 year

12V DC PERFORMANCE SPECS (first layer)

Line Pull	Line Speed	Motor	Pull by layer:
Lbs. (kg)	Ft./min.	Current	layer/Lbs. (kg)
	(M/min.)		
0	15.8 (4.8)	20 amps	1/3500 (1588)
500 (227)	13.4 (4.1)	41 amps	2/2934 (1331)
1000 (454)	11.2 (3.4)	60 amps	3/2525 (1145)
1500 (680)	9.3 (2.8)	79 amps	4/2216 (1005)
2000 (907)	7.6 (2.3)	100 amps	5/1975 (896)
2500 (1134)	6.2 (1.9)	124 amps	
3000 (1361)	5.0 (1.5)	155 amps	
3500 (1588)	4.0 (1.2)	192 amps	

DIMENSIONS



(339.4mm)	(104.3mm) (104.3mm)
B 4.74" (120.5mm)	E 3.30" (83.9mm)
© 3.07" (78 mm)	(88.3mm)

Mounting bolt pattern: 3.0" x 4.87" (76.2mm x 123.7mm)

VRX 25 AND 25-S



SPECIFICATIONS

Part number: 101025 (VRX 25),

101020 (VRX 25-S)

Rated line pull: 2,500 Lbs. (1134 kg) single-line

Motor: 12V DC permanent magnet
Sealing: IP68-rated waterproof

Gear train: 3-stage planetary

Fasteners: All stainless steel

Rope: VRX 25: 50' x 3/16" (15m x 4.8mm) steel, VRX 25-5: 50' x 3/16" (15m x 4.8mm) synthetic

Hook: Zinc plated

Fairlead: VRX 25: Roller,

VRX 25-S: Cast aluminum hawse

Primary control: Handlebar-mounted rocker switch

Remote control: Sold Separately

Brake: Mechanical Brake


Mechanical Warranty: Limited lifetime

Electrical Warranty: 3 year

12V DC PERFORMANCE SPECS (first layer)

Line Pull	Line Speed	Motor	Pull by layer:
Lbs. (kg)	Ft./min.	Current	layer/Lbs. (kg)
	(M/min.)		
0	17.5 (5.3)	20 amps	1/2500 (1134)
500 (227)	14.3 (4.3)	45 amps	2/2141 (971)
1000 (454)	12.0 (3.6)	71 amps	3/1872 (849)
1500 (680)	9.9 (3.0)	98 amps	4/1663 (754)
2000 (907)	8.0 (2.4)	128 amps	5/1496 (679)
2500 (1134)	6.8 (2.1)	159 amps	

DIMENSIONS



(A) 13.2" (335.3mm) (D) 3.94" (100.2mm) (B) 4.74" (120.5mm) (E) 3.30" (83.9mm)

Mounting bolt pattern: 3.0" x 4.87" (76.2mm x 123.7mm)



CHOOSING THE RIGHT WINCH: VRX VS. AXON

Whether it's a hard-working ATV or a dune-hopping Side x Side, different vehicles—and different tasks—require different winches. Warn offers its powersports winches in capacities ranging from 2,500 lbs. (1134 kg) all the way up to a massive 5,500 lbs. (2495 kg), with ultra-durable steel or lightweight, easy-to-handle synthetic rope.

But no matter which winch you choose, you'll get IP68-rated waterproofing to keep the water and elements out; all-metal construction for the ultimate in durability; a three-stage planetary gear train for smooth and reliable operation; and an easy-to-turn clutch dial based on decades of WARN 4WD hub-lock know-how.

PRODUCT LINE COMPARISON

FEATURES	VRX	AXON		
Available capacities (lbs.)	2,500, 3,500, 4,500	3,500, 4,500, 5,500		
Suitable Vehicles	ATVs and 2 person Side x Sides	Large ATVs and 2 person and 4 person Side x Sides		
Anchoring System	Through drum technology	Through drum technology		
Motor Type	Standard duty permanent magnet	WARN patented Motactor - integrated high performance motor and contactor		
Contactor	External, remotely mounted contactor	Warn patented Motactor - integrated high performance motor and contactor		
Remote Control	VRX 25 — handlebar switch VRX 35 — handlebar switch VRX 45 — dash rocker and wired remote	AXON 35 — Rockerbar digital control switch and handlebar mount adaptor AXON 45 — Rockerbar digital control switch and digital wired remote AXON 55 — Rockerbar digital control switch and digital wired remote		
Performance Sensors	None	Actively monitors winch load, temperature, and vehicle battery condition		
Clutch Mechanism	Hub-lock based, easy-grip, protected clutch design	Hub-lock based, easy-grip, protected clutch design		
Wiring	4 - + & -, battery to contactor, contactor to winch	2 - +&-, battery to winch		
Synthetic Rope	Standard duty synthetic rope	Spydura synthetic rope		
Hawse Fairlead	Cast aluminum hawse	Epic premium aluminum hawse		
Brake system	Integrated compact spring brake	Integrated compact spring brake		
Winch structural bracing	Tie rods	Tie plate		
Final point of assembly	Warn facility in Oregon, USA	Warn facility in Oregon, USA		
Sealing	IP68	IP68		
Corrosion resistance	240 hour salt spray	408 hour salt spray		
Fasteners	All stainless steel	All stainless steel		
Warranty Mechanical	Limited Lifetime	Limited lifetime		
Warranty Electrical	3 years	3 years		

STEEL VS. SYNTHETIC WINCH ROPE.

WARN AXON and VRX winches are available with either steel rope or synthetic rope. But which one is right for you? Let's look at some of the features and benefits of both.

Steel rope is extremely durable, abrasion resistant, and is good for utility applications where the line may contact objects like stumps, rocks, and other things that rub against the rope. Of course it's still a good choice for vehicle recovery, and has been used for decades by enthusiasts and workers alike. However, steel rope is heavier and less flexible than synthetic line. Steel rope is less expensive than synthetic rope.

Synthetic rope is strong, lightweight, easy to handle, and it'll even float on water making it great for vehicle recovery. Synthetic rope is more prone to damage by abrasion, and requires the use of the included abrasion sleeve when the rope comes into contact with an object. Additionally, synthetic rope should be inspected regularly for ultraviolet (UV) wear and is more expensive than steel rope. However, it's a great choice for those who are looking to keep weight down, push the limits with their vehicle, and use the winch frequently.





WINCH SPECIFICATIONS: AXON VS. VRX

	VRX 25 VRX 25-S	VRX 35 VRX 35-S	VRX 45 VRX 45-S	AXDN 35 AXDN 35-S	AXON 45 AXON 45-S AXON 45RC	AXON 55 AXON 55-S	
Pulling Capacity	2,500 lbs	3,500 lbs	4,500 lbs	3,500 lbs	4,500 lbs	5,500 lbs	
Finish	Semi-gloss powdercoat	Semi-gloss powdercoat	Semi-gloss powdercoat	Satin black powder coat	Satin black powder coat	Satin black powder coat	
Mechanical Warranty	Limited lifetime	Limited lifetime	Limited lifetime	Limited lifetime	Limited lifetime	Limited lifetime	
Electrical Warranty	3 year	3 year	3 year	3 year	3 year	3 year	
Weight	VRX 25 - 17.3 lbs, VRX 25-S - 14.7 lbs	VRX 35 - 18.8 lbs VRX 35-5 - 15.1 lbs	VRX 45 - 21.7 lbs VRX 45-5 - 17.0 lbs	AXON 35 - 23.3 lbs AXON 35-S - 19.7 lbs	AXON 45 - 25.8 lbs AXON 45-5 - 21.1 lbs AXON 45RC - 20.0 lbs	AXON 55 - 25.8 lbs AXON 55-S - 21.1 lbs	
Winch Dimensions (WxDxH)	13.1" x 4.7" x 4.7"	13.4" x 4.7" x 4.7"	15.0" x 4.7" x 4.7"	13.3" x 4.6" x 4.8"	AXON 45, 45-S - 15.0" x 4.6" x 4.8" AXON 45RC - 13.3" x 4.6" x 4.8"	15.0" x 4.6" x 4.8"	
Mounting pattern	3.0" x 4.87"	3.0" x 4.87"	3.0" x 6.59"	3.0" x 4.87"	AXON 45, 45-S - 3.0" x 6.59" AXON 45RC - 3.0" x 4.87"	3.0" x 6.59"	
Rope type	VRX 25 - 3/16" x 50' wire VRX 25-S - 3/16" x 50' synthetic rope	VRX 35 - 7/32" x 50' wire VRX 35-S - 3/16" x 50' synthetic rope	VRX 45 - 1/4" x 50' wire VRX 45-S - 1/4" x 50' synthetic rope	AXON 35 - 7/32" x 50' wire AXON 35-S - 3/16" x 50' Spydura synthetic rope	AXON 45 - 1/4" x 50' wire AXON 45-5 - 1/4" x 50' Spydura synthetic rope AXON 45RC - 1/4" x 27' Spydura synthetic rope	AXON 55 - 1/4" x 50' wire AXON 55-5 - 1/4" x 50' Spydura synthetic rope	
Winch Structural Bracing	Zinc plated tie-rods	Zinc plated tie-rods	Zinc plated tie-rods	Tie plate	Tie plate	Tie plate	
Hook	Zinc plated	Zinc plated	Zinc plated	Black powder coat	Black powder coat	Black powder coat	
Fairlead	VRX 25 - Roller VRX 25-5 - Cast aluminum hawse	VRX 35 - Roller VRX 35-5 - Cast aluminum hawse	VRX 45 - Roller VRX 45-S - Cast aluminum hawse	AXON 35 - Roller AXON 35-S - EPIC Premium Hawse Fairlead	AXON 45 - Roller AXON 45-S, 45RC- EPIC Premium Hawse Fairlead	AXON 55 - Roller AXON 55-S - EPIC Premium Hawse Fairlead	
Clutch	Hub-lock based, easy-grip, recessed clutch design	Hub-lock based, easy-grip, recessed clutch design	Hub-lock based, easy-grip, recessed clutch design	Hub-lock based, easy-grip, recessed clutch design	Hub-lock based, easy-grip, recessed clutch design	Hub-lock based, easy-grip, recessed clutch design	
Winch Controls	Handlebar mini-rocker	Handlebar mini-rocker	Dash mounted rocker Wired remote	Rockerbar digital control switch and Handlebar mount adaptor	Rockerbar digital control switch and Digital wired remote	Rockerbar digital control switch and Digital wired remote	
Fasteners	All stainless steel	All stainless steel	All stainless steel	All stainless steel	All stainless steel	All stainless steel	
Gears	Powdered metal	Powdered metal	Powdered metal with bushings	Powdered metal	Heat treated powdered metal with bushings	Heat treated powdered metal with bushings	
Geartrain	3-stage planetary	3-stage planetary	3-stage planetary	3-stage planetary	3-stage planetary	3-stage planetary	
Gear ratio	153:1	153:1	198:1	168:1	239:1	239:1	
Brake	Integrated compact spring brake	Integrated compact spring brake	Integrated compact spring brake	Integrated compact spring brake	Integrated compact spring brake	Integrated compact spring brake	
End housing	Die-cast aluminum	Die-cast aluminum	Die-cast aluminum	Die-cast aluminum	Die-cast aluminum	Die-cast aluminum	
Durability	600+ cycles	600+ cycles	600+ cycles	1100+ cycles	1100+ cycles	1100+ cycles	
Corrosion resistance	240 hour salt spray	240 hour salt spray	240 hour salt spray	408 hour salt spray	408 hour salt spray	408 hour salt spray	
Sealing	IP68	IP68	IP68	IP68	IP68	IP68	
No Load Line Speed	17.5 ft/min	15.8 ft/min	16.2 ft/min	20.1 ft/min	15.9 ft/min	15.5 ft/min	
Full Load Line Speed	6.8 ft/min	4.0 ft/min	4.3 ft/min	6.1 ft/min	AXON 45, 45-S - 4.8 ft/min AXON 45RC - 4.4 ft/min	4.7 ft/min	
No Load Current Draw	20 A	20 A	20 A	35 A	AXON 45, 45-5 - 33 A AXON 45RC - 28 A	28 A	
Full Load Current Draw	159 A	192 A	252 A	204 A	AXON 45, 45-S - 208 A AXON 45RC - 198 A	254 A	







Control your WARN AXON, VRX, ProVantage, or Vantage powersports winch with your Bluetooth-enabled smart device


This state-of-the-art wireless control system allows you to operate your power-sports winch using the Bluetooth connection on your smart device. The IP68 waterproof HUB Wireless Receiver connects to your winch, and then our free custom-developed app for either iOS or Android communicates with the receiver via Bluetooth signal. Your smart device will be able to operate the winch from up to 100' away and monitor your vehicle's battery voltage. AXON versions will also let you observe the winch's load and winch's motor temperature so you know exactly what's going on during a recovery.





- Control your WARN AXON, VRX, ProVantage, and Vantage winch wirelessly from up to 100' away using the Bluetooth connection on your smart device and our free app
- · Easy plug-and-play setup
- When paired, HUB lets you control your winch and provides voltage info. AXON winches also display load and motor temperature information
- VRX, Provantage, and Vantage versions are wired directly to the winch's contactor.
- Mounts to any tube or flat surface with built-in mounting features and includes zip ties
- Multi-color LED indicates receiver status
- Rugged construction features fully potted and IP68 sealed electronics
- VRX, Provantage, and Vantage versions include 6' wiring hardness allowing receiver to be mounted up under the hood for security.



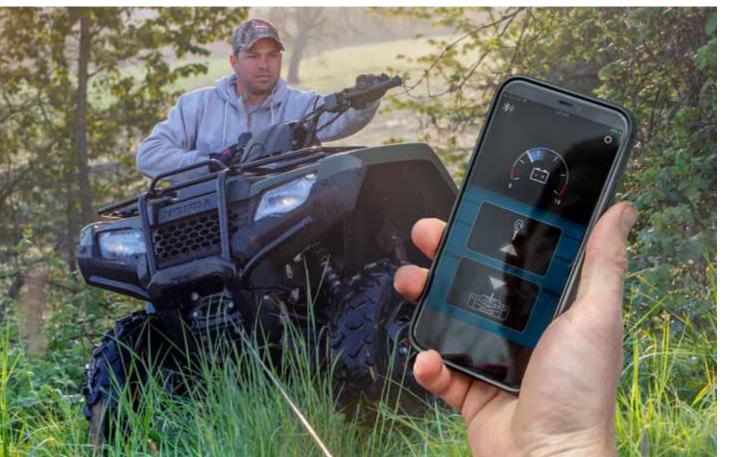

WARN EPIC ACCESSORIES

Featuring a WARN-exclusive 12-stage coating process; utilizing e-coat and powder coatings, these market-leading accessories deliver visual appeal, improved impact-resistance and a longer wear cycle than standard winch accessories.

EPIC TREE TRUNK PROTECTOR

The WARN Epic Tree Trunk Protector Strap is designed to help protect a live tree from damage during winching operations and self-recovery situations. The strap is constructed of premium quality nylon with an encased red warning marker to indicate damaged webbing. Plus, end loops are reinforced with durable ring connectors and e-coated and powder coated for premium protection against wear and abrasion. The 1" x 8' Tree Trunk Protector is rated to 7,200 lbs.



The Epic Shackle provides a means for connecting the looped ends of cables, straps, and snatch blocks. The shackle's pin is threaded to allow easy removal. Rated for 5,000 lb. capacity winches and under.

PN 92092 1/2" (12.7mm) shackle with 5/8" (15.9mm) pin diameter For 5,000 lb. (2268 kg) capacity winches and under.



EPIC WINCH HOOK

The WARN Epic Winch Hook provides maximum protection and reliability against wear and abrasion. It's also been uniquely designed with a built-in beverage opener. The hook is rated for 5,000 lb. capacity winches and under.

PN 92089

For 5,000 lb. (2268 kg) capacity winches and under



Able to accept both wire and synthetic rope, the Epic Snatch Block is reliable, durable, and ready for action. When used properly, the multi-purpose snatch block can double the pulling power of any winch or change your pulling direction without

damaging the rope. It also helps to reduce heat buildup and amp draw during recovery. Rated for 5,000 lb. winch capacities and under.

PN 92097

Rated for 5,000 lbs. (2268 kg) winch capacity and under

TOOL ROLL RECOVERY KIT

This compact recovery kit offers must-have Powersports winching accessories in one convenient tool roll. The kit includes:

• A tool roll, two 1/2" (12.7mm) shackles, a tree strap, and winching gloves

 The tool roll is constructed of durable ballistic nylon with secure hook-and-loop enclosure that firmly attaches to ATV racks or Side x Side roll bars

• Includes additional storage space for other accessories and tools

 Tool roll doubles as a winch line damper for increased safety during recovery

 Includes easy-to-follow basic rigging illustrations printed directly on the inside of the tool roll.

PN 99901







LIGHT DUTY WINCHING ACCESSORY KIT

Double your pulling power, change your pulling direction, and keep your winch in proper working order. Accessory Kit includes 1/2" (12.7mm) shackle, 9,000 lbs. (4082 kg) maximum capacity snatch block, and two 1"x 8' (25.4mm x 2.4m) tree trunk protectors and WARN winching gloves. It all comes in a heavyweight denier carry bag. PN 88915

TREE TRUNK PROTECTOR

1" x 8' (25mm x 2.4m) load strap. Rated to 6.400 lbs. (2903 kg) PN 88896



WINCH HOOK AND STRAP

AXON replacement hook and strap PN 89541

VRX replacement hook and strap PN 39557



WINCH HOOK BUMP STOP FOR **POWERSPORTS WINCHES**

- · Extends the life of your winch
- · Prevents winch hook from bottoming out
- · Prolongs hook and winch life
- Split design for easy installation
- Rubber construction

PN 99944

SNATCH BLOCK

Assists in double-lined and angled pulls. Rated for 4.500 lb. (2041 kg) winches and under.

PN 88898

SPYDURA SOFT SHACKLE

Our soft shackles are made with flexible, heavy-duty UHMWPE (ultra-highmolecular-weight polyethylene) fibers and are lightweight, easy to pack, and easy to use.

- 3/8" Soft Shackle
- 25,110 lbs. minimum breaking strength.

PN 102556

SHACKLE

For 4,500 lbs. (2041 kg) capacity winches and under. 1/2" (12.7mm) shackle with 5/8" (15.9mm) diameter pin. PN 88998



RECEIVER SHACKLE BRACKET

Utilizes a 1¼" Class I receiver as a recovery or pulling point.

PN 62041 Includes bracket, hitch pin and shackle. PN 88998 Shackle only.



WIRELESS CONTROL SYSTEM

- Control your winch from up to 50' away
- Sealed for protection against the elements
- Activation sequence guards against accidental power-ups
- Kit includes wireless transmitter, receiver, holster, lanyard and mounting hardware

PN 90288 For Powersports Winches. Works with WARN ProVantage, Vantage, and VRX winches.

REMOTE CONTROL REPLACEMENT AND UPGRADE KIT

PN 64259 Everything needed to add a hand-held remote control to your Vantage, ProVantage, and VRX winches. Includes remote control, socket, and wiring.

PN 64849 Replacement remote only. For Vantage, ProVantage, and VRX winches. Works with PN 64259 and PN 99897.

PN 100963 Everything needed to add a hand-held remote control to your AXON winch. Includes remote control, socket, and wiring.

PN 100964 Replacement remote only. For AXON winches only.

PN 100962 Replacement dash switch. For AXON winches only.

PN 64851 Replacement handlebar switch. For VRX winches only.

PN 89587 Replacement dash rocker switch. For Vantage and ProVantage winches only.

ILLUMINATED DASH ROCKER SWITCH KIT

Illuminated dash-mounted switch is designed to operate your WARN winch. Kit includes illuminated dash-mounted switch, socket for corded remote. and all required wiring.

PN 99897

- Easy plug-and-play installation





Standard Duty Contactor For VRX 2500, 2500-S. 3500, 3500-S, 4500, and 4500-S



PN 89579

Heavy Duty Contactor For VRX, ProVantage, and Vantage 4000/4000-S



PN 89564

For Vantage 3000. Vantage 3000-S. Vantage 2000. Vantage 2000-S




MULTI-MOUNT PORTABLE WINCH SYSTEM FOR ATVS AND SIDE X SIDES

If your ATV or Side x Side has a 1¼" or 2" Class I front or rear receiver, then the Multi-Mount carrier is a versatile way to mount a WARN® winch. Plus, it allows you to quickly remove the winch whenever you want.

The Multi-Mount works by simply bolting a WARN winch to the carrier, installing the Quick Connect wiring kit, and inserting the carrier into the receiver.

HOW TO ORDER You'll need three items:





- 1. Choose a VRX 25 or VRX 35 winch.
- 2. Winch carrier designed to fit 11/4" receiver. PN 70925
- 50 amp Quick Connect wiring kit for both front and back of vehicle. Includes 20" winch lead, 48" front battery lead and 96" rear battery lead. PN 70918

SIDE X SIDE WITH A 11/4" RECEIVER:

- 1. Choose a VRX 25 or VRX 35 winch.
- 2. Winch carrier designed to fit 11/4" receiver. PN 70925
- 50 amp Quick Connect wiring kit for both front and back of vehicle. Includes 20" winch lead, 48" front battery lead, and 120" rear battery lead. PN 70928

SIDE X SIDE WITH A 2" RECEIVER:

- 1. Choose a VRX 45 winch.
- 2. Winch carrier designed to fit 2" receiver. PN 70919
- 175 amp Quick Connect wiring kit for both front and back of vehicle. Includes 20" winch lead, 48" front battery lead, and 120" rear battery lead. PN 70920

ATV A WITH 2" RECEIVER:

- 1. Choose a VRX 25 or VRX 35 winch.
- 2. Winch carrier designed to fit 2" receiver. PN 70917
- 50 amp Quick Connect wiring kit for both front and back of vehicle. Includes 20" winch lead, 48" front battery lead, and 120" rear battery lead. PN 70928



MULTI-MOUNT ACCESSORIES AND REPLACEMENT PARTS

POWER LEADS WITH QUICK CONNECT PLUG 50 amp-for use with Powersports winches,

3500 lbs. capacity and less
PN 70939 (20" winch lead)

PN 72886 (48" battery lead) PN 72888 (96" battery lead) PN 70927 (120" battery lead)

PN 22681 (Quick Connect plugs only)

175 amp-for use with Powersports winches 4,000 lbs. capacity and higher

PN 36080 (28" winch lead)

PN 70926 (48" battery lead) PN 26405 (90" battery lead) PN 70717 (120" battery lead)

PN 22680 (Quick Connect plugs only)

Wiring Kit (for use with Powersports winches, 3500 lbs. capacity and less)

Designed for the Multi-Mount owner who wants to wire a second bike. Kit includes front and rear power leads with 50 amp Quick Connect plugs, remote control plug with wiring harness, electrical contactor and installation wires.

PN 64874

STEEL RECEIVER SHACKLE BRACKET

Utilizes a 1¼" Class I receiver as a recovery or pulling point.

PN 62041

(Includes bracket, hitch pin and shackle).

PN 28884 (Shackle only) For 2" receivers use PN 29312

Hitch Cover

For 2" receiver (black rubber). PN 37509



Dust Caps For Quick Connect Plugs

PN 60917 for 50 amp plugs. PN 69847 for 175 amp plugs.



EPIC HAWSE FAIRLEADS

Constructed of aluminum, with a gunmetal powder coat finish. Designed with a large opening radius to help minimize rope wear. For use with synthetic rope only.

PN 100967 Epic Hawse Fairlead (short), replacement for AXON 35 and 45RC, upgrade for VRX 25 and 35, ProVantage 2500 and 3500, and Vantage 2000 and 3000 winch lines.

PN 100968 Epic Hawse Fairlead (long), replacement for AXON 45 and 55, upgrade for VRX 45, ProVantage 4500, and Vantage 4000 winch lines.



REPLACEMENT HAWSE FAIRLEADS

Designed to be used with synthetic rope, and to decrease the possibility of fraying. Replacements available for VRX, ProVantage and Vantage powersports winches.

PN 94244 Replacement fairlead for Vantage 4000-S. Cast aluminum construction with durable black powdercoat finish. 7.37" wide.

PN 94242 Replacement fairlead for Vantage 2000-S and 3000-S. Cast aluminum construction with durable black powdercoat finish. 6.25" wide.

ROLLER FAIRLEAD

Reduces excessive wear on your winch rope and aids in angled pulls.



PN 28929 Replacement for VRX 25, and Vantage 2000 and 3000

PN 100965 Replacement for VRX 35 and AXON 35

PN 100966 Replacement for VRX 45, AXON 45 and 55, Vantage 4000

PN 69373 Replacement for ProVantage 2500 and 3500

PN 82550 Replacement for ProVantage 4500

SYNTHETIC ROPE CONVERSION KITS

For use with WARN Powersports winches with aluminum drums. All kits include synthetic rope, rock guard sleeve and fairlead.

PN 100969 Epic Hawse Fairlead (short) and 50' of Spydura synthetic rope for AXON 35 and 45RC, upgrade for VRX 25 and 35, ProVantage 2500 and 3500, and Vantage 2000 and 3000 winch lines.

PN 100970 Epic Hawse Fairlead (long) and 50' of Spydura synthetic rope for AXON 45 and 55, upgrade for VRX 45, ProVantage 4500, and Vantage 4000 winch lines.

PN 72128 For ProVantage 2500 and 3500, Vantage 2000 and 3000. Includes 50' of 3/16" diam. rope with roller fairlead





REPLACEMENT ROPE FOR POWERSPORTS WINCHES

Strong, lightweight, and easy-to-handle synthetic, or durable long lasting steel winch rope. Available in a variety of lengths and diameters. Synthetic ropes include sliding wear sleeve.

		ROPE INFORMATION		ROPE PART NUMBERS	
WINCH MODEL	PART NUMBER	LENGTH	DIAMETER	WIRE	SYNTHETIC
ProVantage 2500	90250	50' (15.2m)	3/16" (4.8 mm)	60076	
ProVantage 2500-s	90251	50' (15.2m)	3/16" (4.8 mm)		73599
ProVantage 3500	90350	50' (15.2m)	3/16" (4.8 mm)	60076	
ProVantage 3500-s	90351	50' (15.2m)	3/16" (4.8 mm)		73599
ProVantage 4500	90450	55' (15.2m)	7/32" (5.6 mm)	68851	
ProVantage 4500-s	90451	55' (16.8m)	7/32" (5.6 mm)		77835
Vantage 2000	89020	50' (15.2m)	5/32" (3.9 mm)	89561	
Vantage 2000-s	89021	50' (15.2m)	5/32" (3.9 mm)		89563
Vantage 3000	89030	50' (15.2m)	3/16" (4.8 mm)	60076	
Vantage 3000-s	89031	50' (15.2m)	3/16" (4.8 mm)		73599
Vantage 4000	89040	55' (15.2m)	7/32" (5.6 mm)	68851	
Vantage 4000-s	89041	55' (16.8m)	7/32" (5.6mm)		77835
VRX 25	101025	50' (15.2m)	3/16" (4.8 mm)	60076	
VRX 25-S	101020	50' (15.2m)	3/16" (4.8 mm)		73599
VRX 35	101035	50' (15.2m)	7/32" (5.6 mm)	100972	
VRX 35-S	101030	50' (15.2m)	3/16" (4.8 mm)		73599
VRX 45	101045	50' (15.2m)	1/4" (6.35mm)	100973	
VRX 45-S	101040	50' (15.2m)	1/4" (6.35mm)		100975
AXON 35	101135	50' (15.2m)	7/32" (5.6 mm)	100972	
AXON 35-S	101130	50' (15.2m)	3/16" (4.8 mm)		73599
AXON 45	101145	50' (15.2m)	1/4" (6.35mm)	100973	
AXON 45-S	101140	50' (15.2m)	1/4" (6.35mm)		100975
AXON 45RC	101240	27' (8.23m)	1/4" (6.35mm)		100976
AXON 55	101155	50' (15.2m)	1/4" (6.35mm)	100973	
AXON 55-S	101150	50' (15.2m)	1/4" (6.35mm)		100975

SYNTHETIC ROPE EXTENSION

Includes lightweight 1/4" diameter rope, which attaches to the winch cable for an additional 50' of distance. 4,000 lb. single line capacity.

PN 69069



